

Bouticcelli

Endy
BT052

Technical Drawings and Dimensions

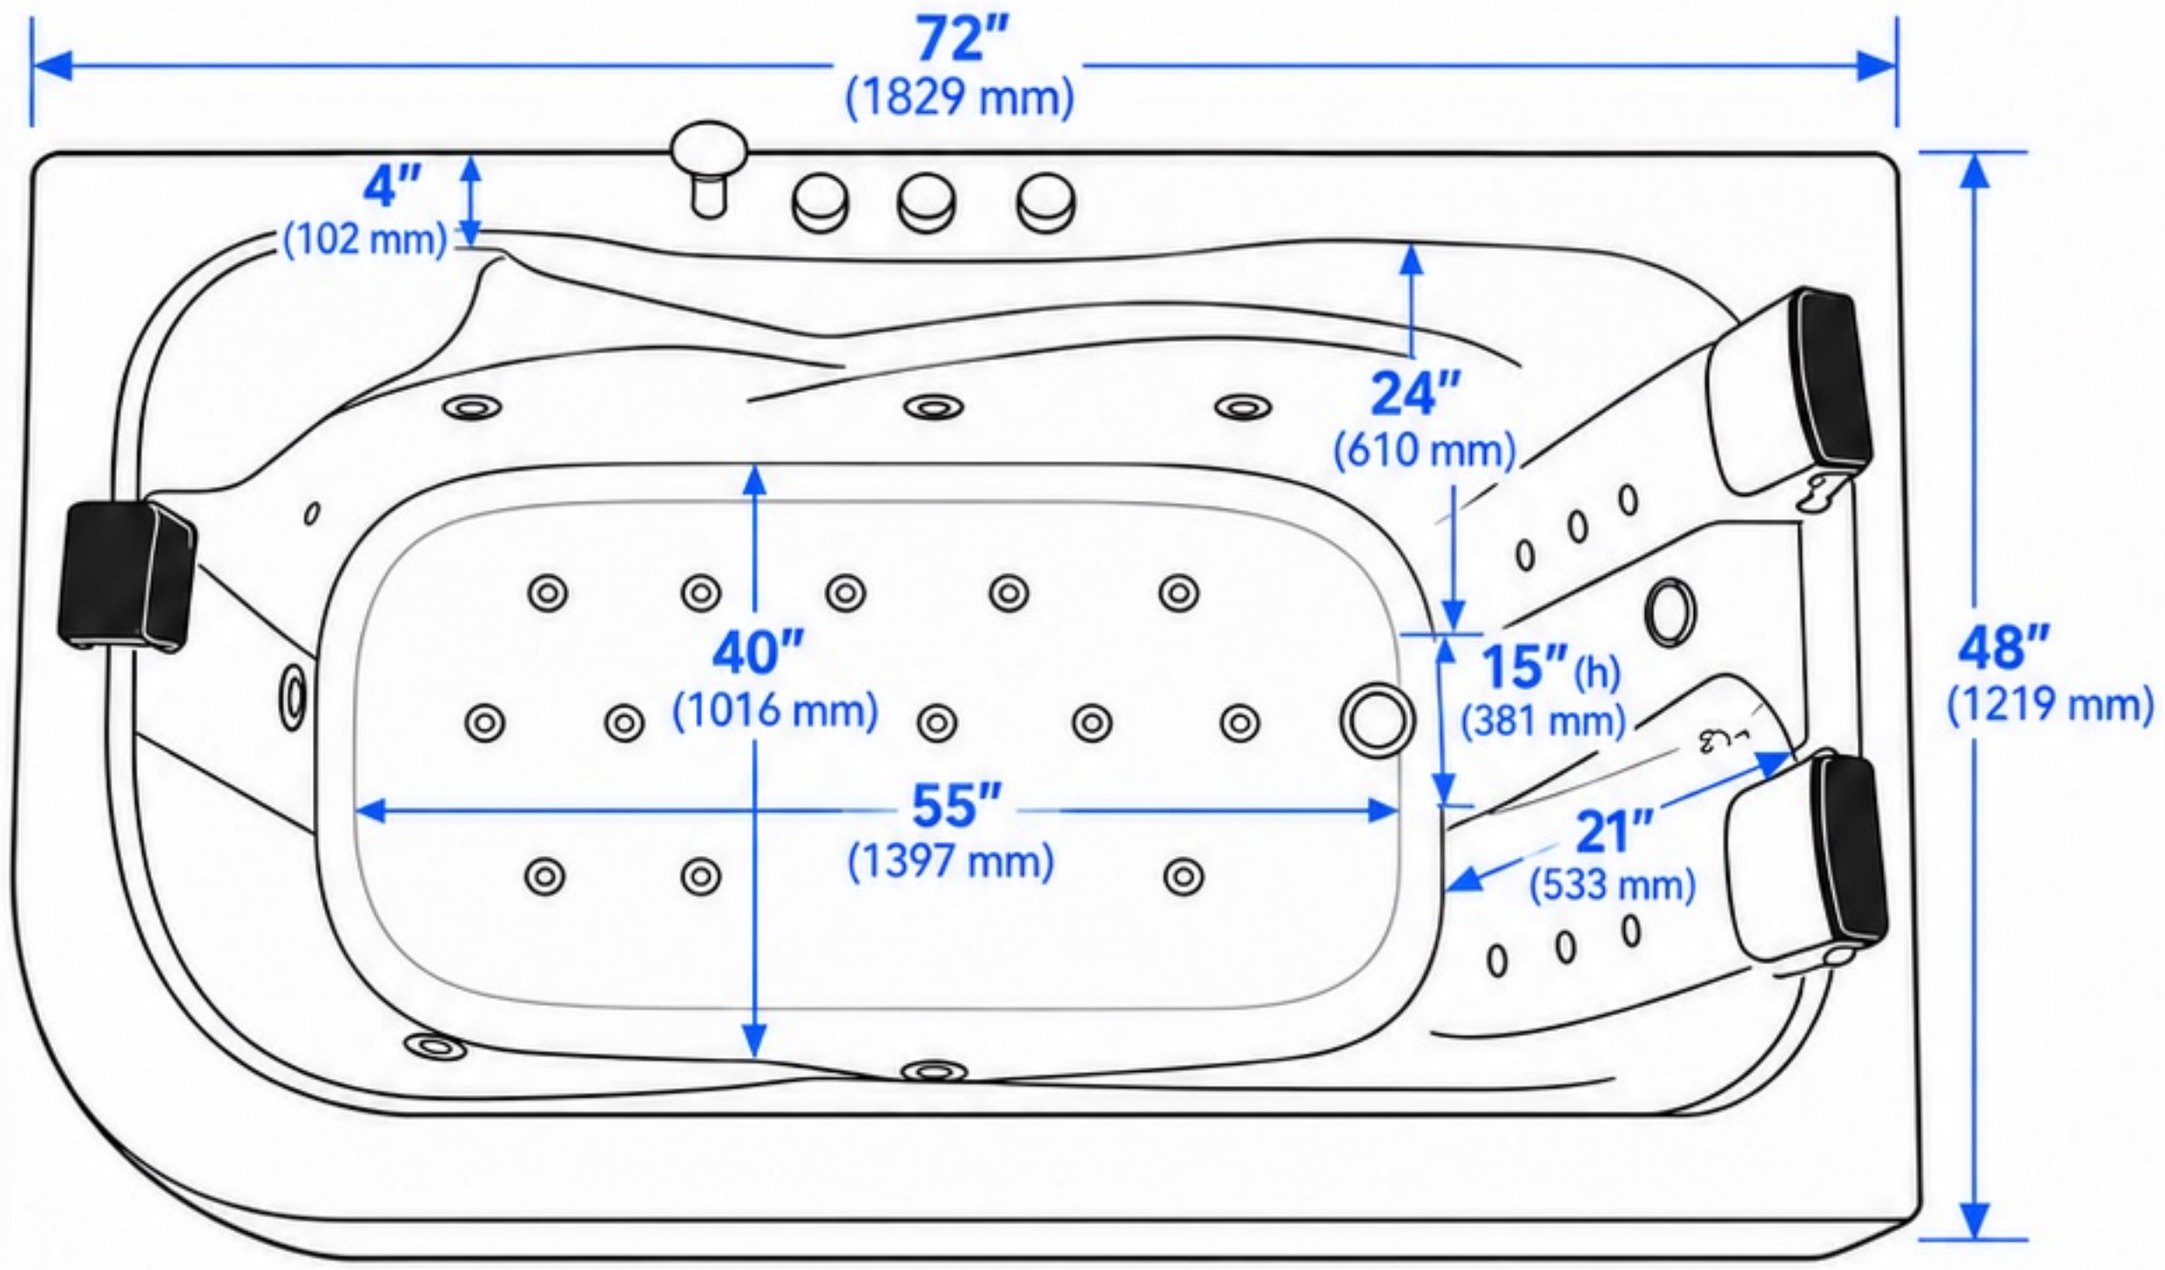

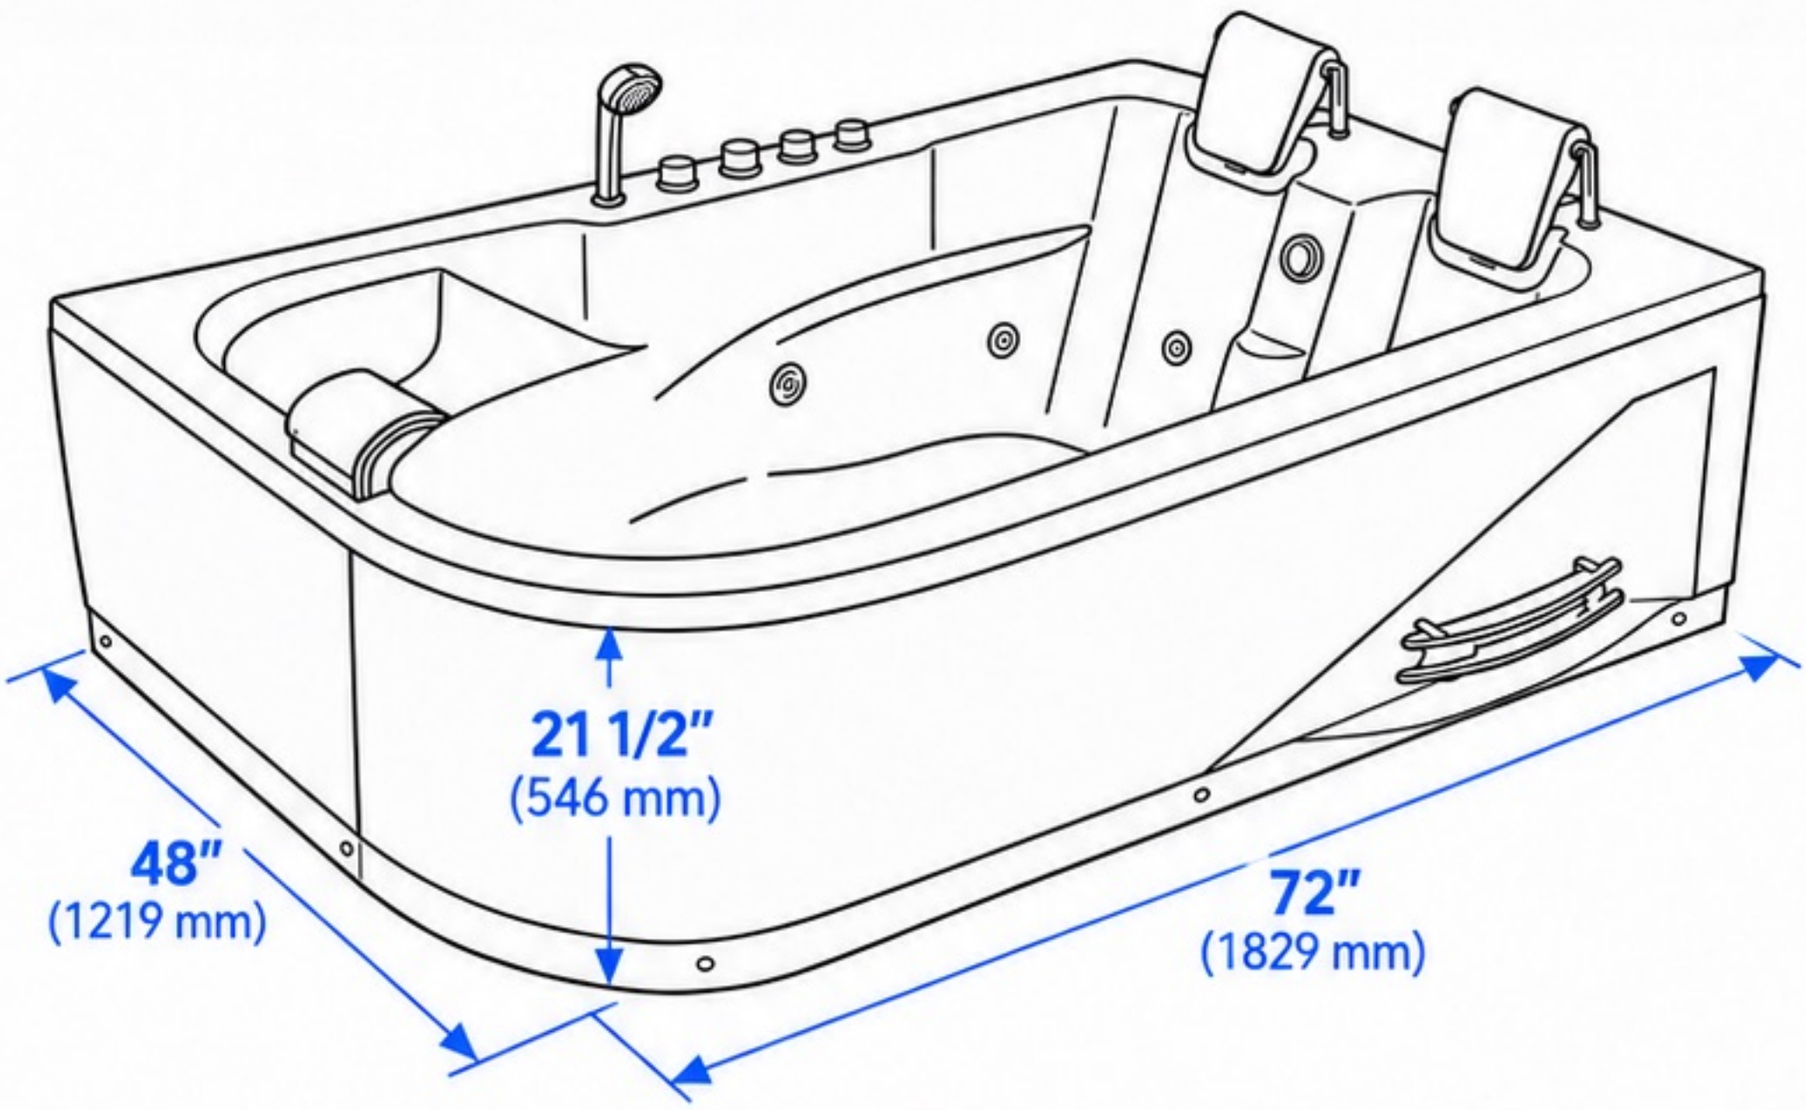


Accurate dimensions | Massage jets | Comfortable seating | Integrated controls | LED lighting

Bouticcelli.com

Bouticcelli

Endy
BT052

Recommended Pre-Installation

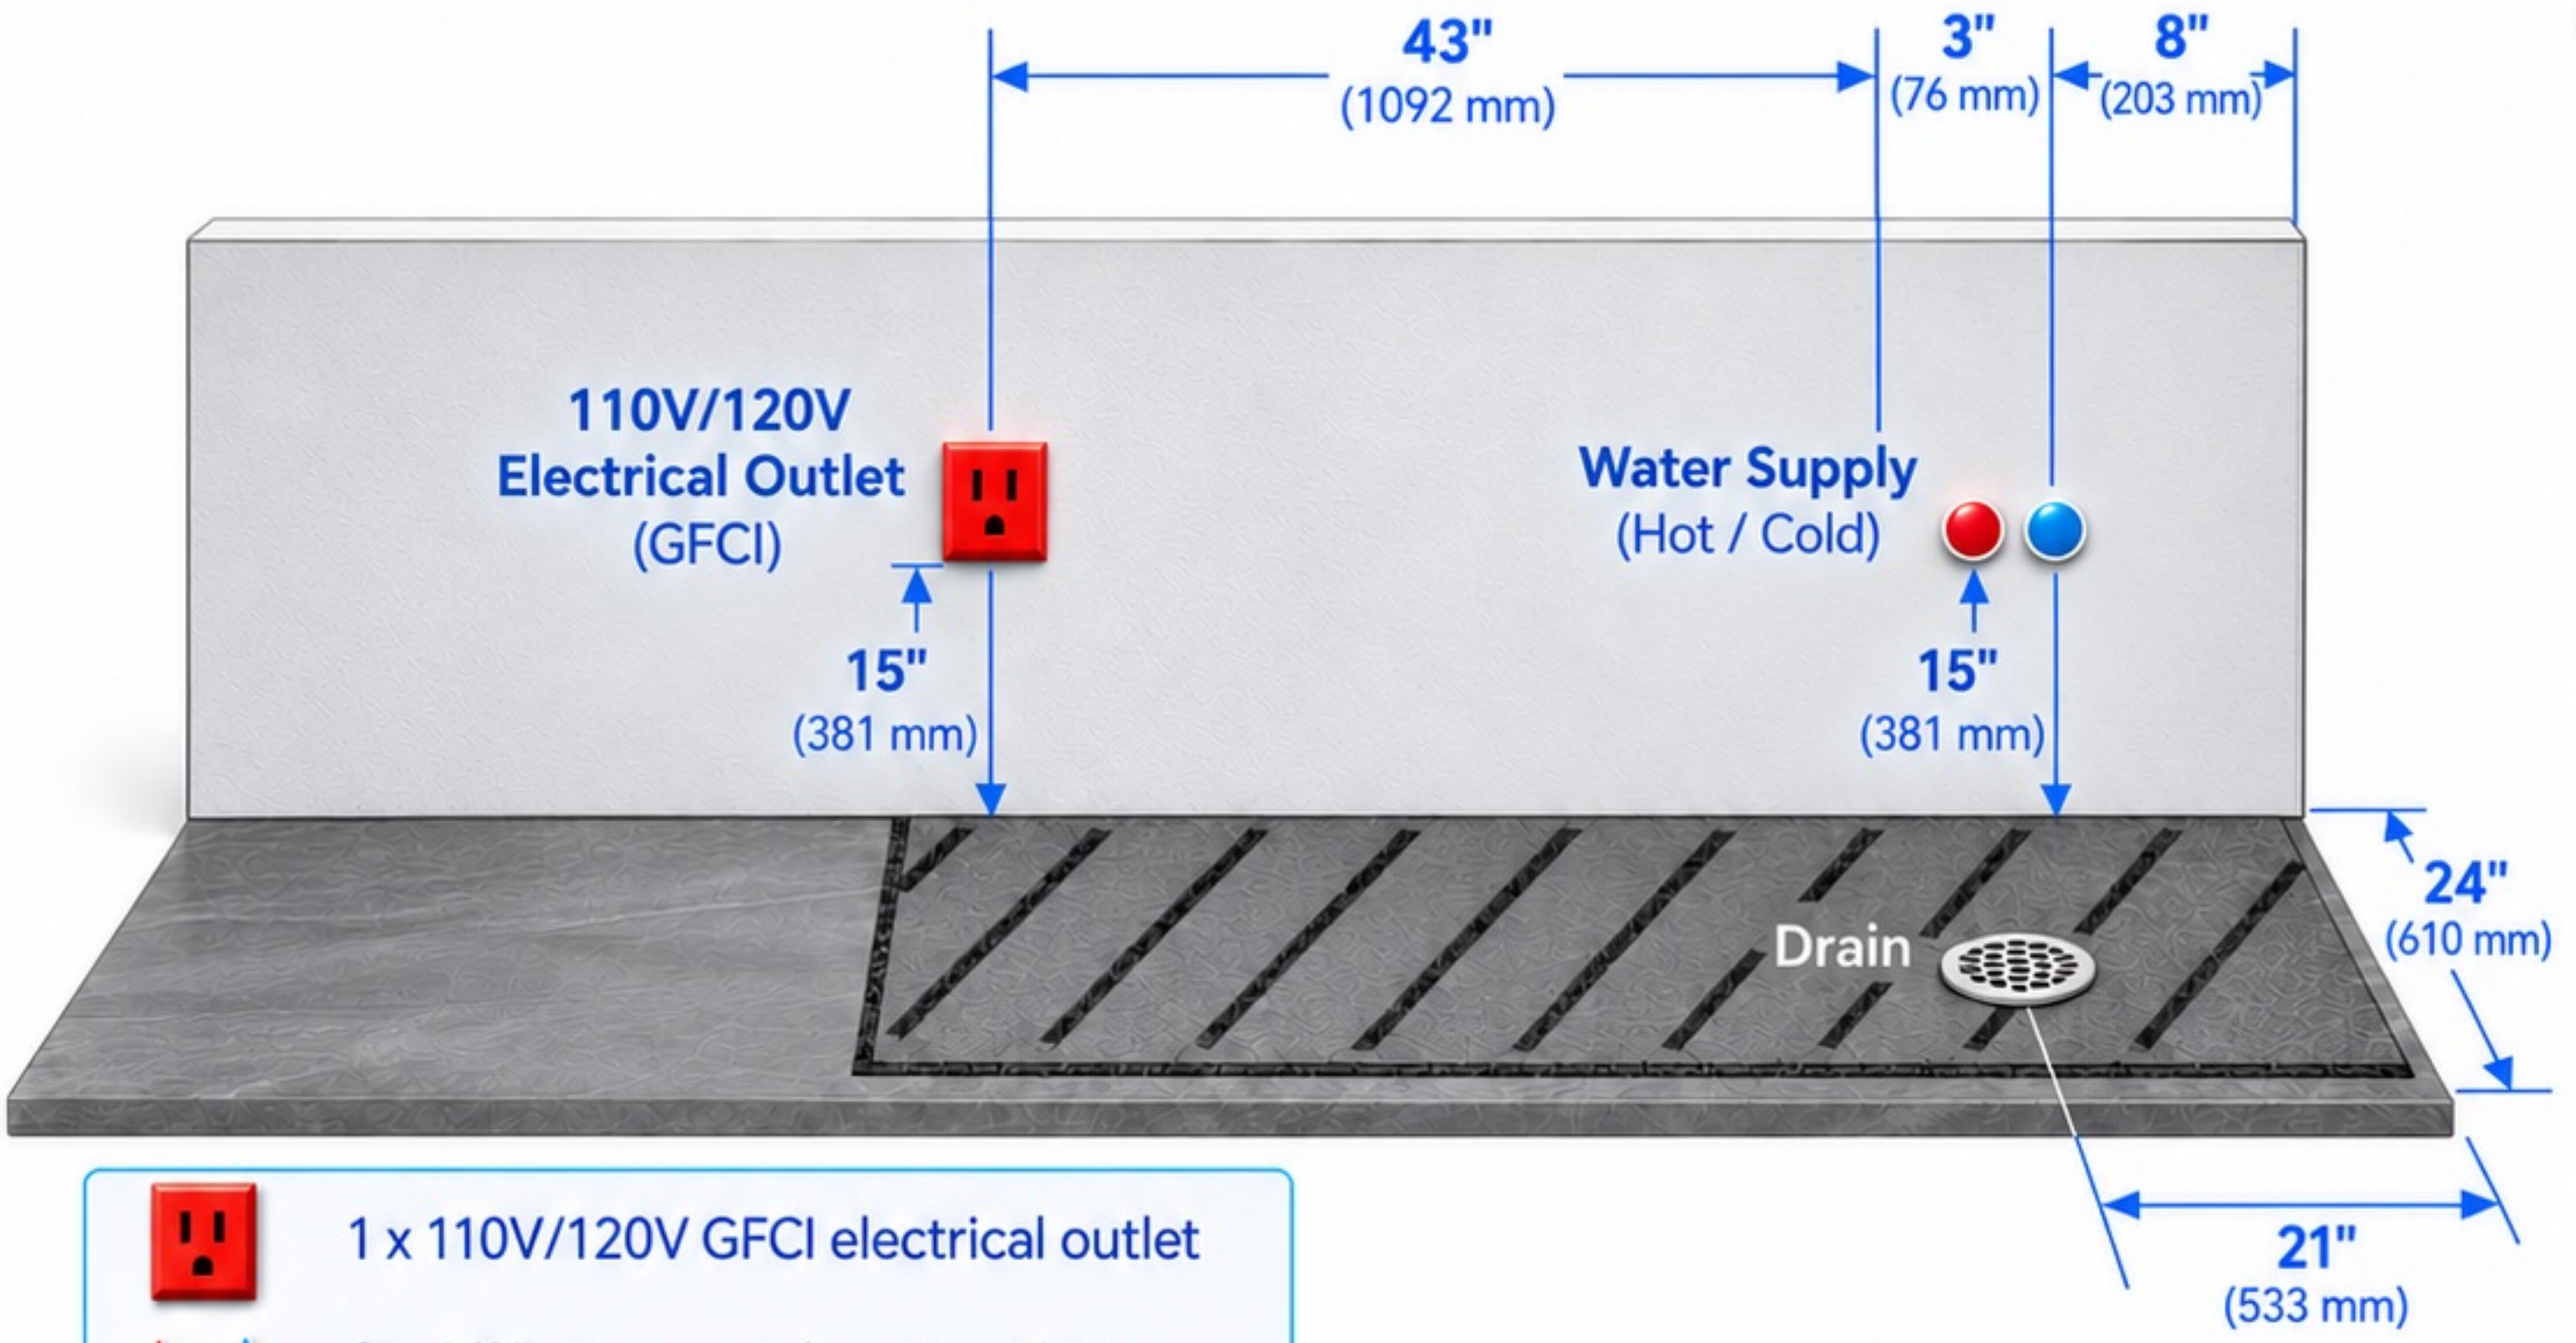

- 1 x 110V/120V GFCI electrical outlet
- 2 x 1/2" water supply connections (hot and cold)
- 1 x 1 1/2" drain connection

Électrical



- Provide 2 metres (6.5 ft) of cable including phase (hot), neutral and ground conductors.

OR

- 110–120 V / 20 A power supply, protected by a ground fault circuit interrupter (GFCI).

Plumbing



- Hot and cold water supply: provide 2 flexible hoses with 1/2" female fittings.
- Provide a 1 1/2" drain for connection to the supplied drain pipe.

Accurate dimensions | Massage jets | Comfortable seating | Integrated controls | LED lighting

Bouticcelli

Endy
BT052

Removable Skirt



The skirt is attached to the bathtub by clamping brackets on the top and support screws on the bottom. It is removable to provide easy access for installation or maintenance.

To remove the skirt:

1. Remove the white plastic caps from the support screws at the bottom of the skirt.
2. Loosen the clamping brackets on the top (one on each side).
3. Carefully pull the skirt towards you to remove it.

To install the skirt:

1. Place the skirt onto the clamping brackets on the top.
2. Tighten the clamping brackets (one on each side) to secure it in place.
3. Insert the support screws at the bottom.
4. Put the white plastic caps back on the screws.