
Bouticcelli

BT55 LORENA

TECHNICAL DRAWINGS AND DIMENSIONS

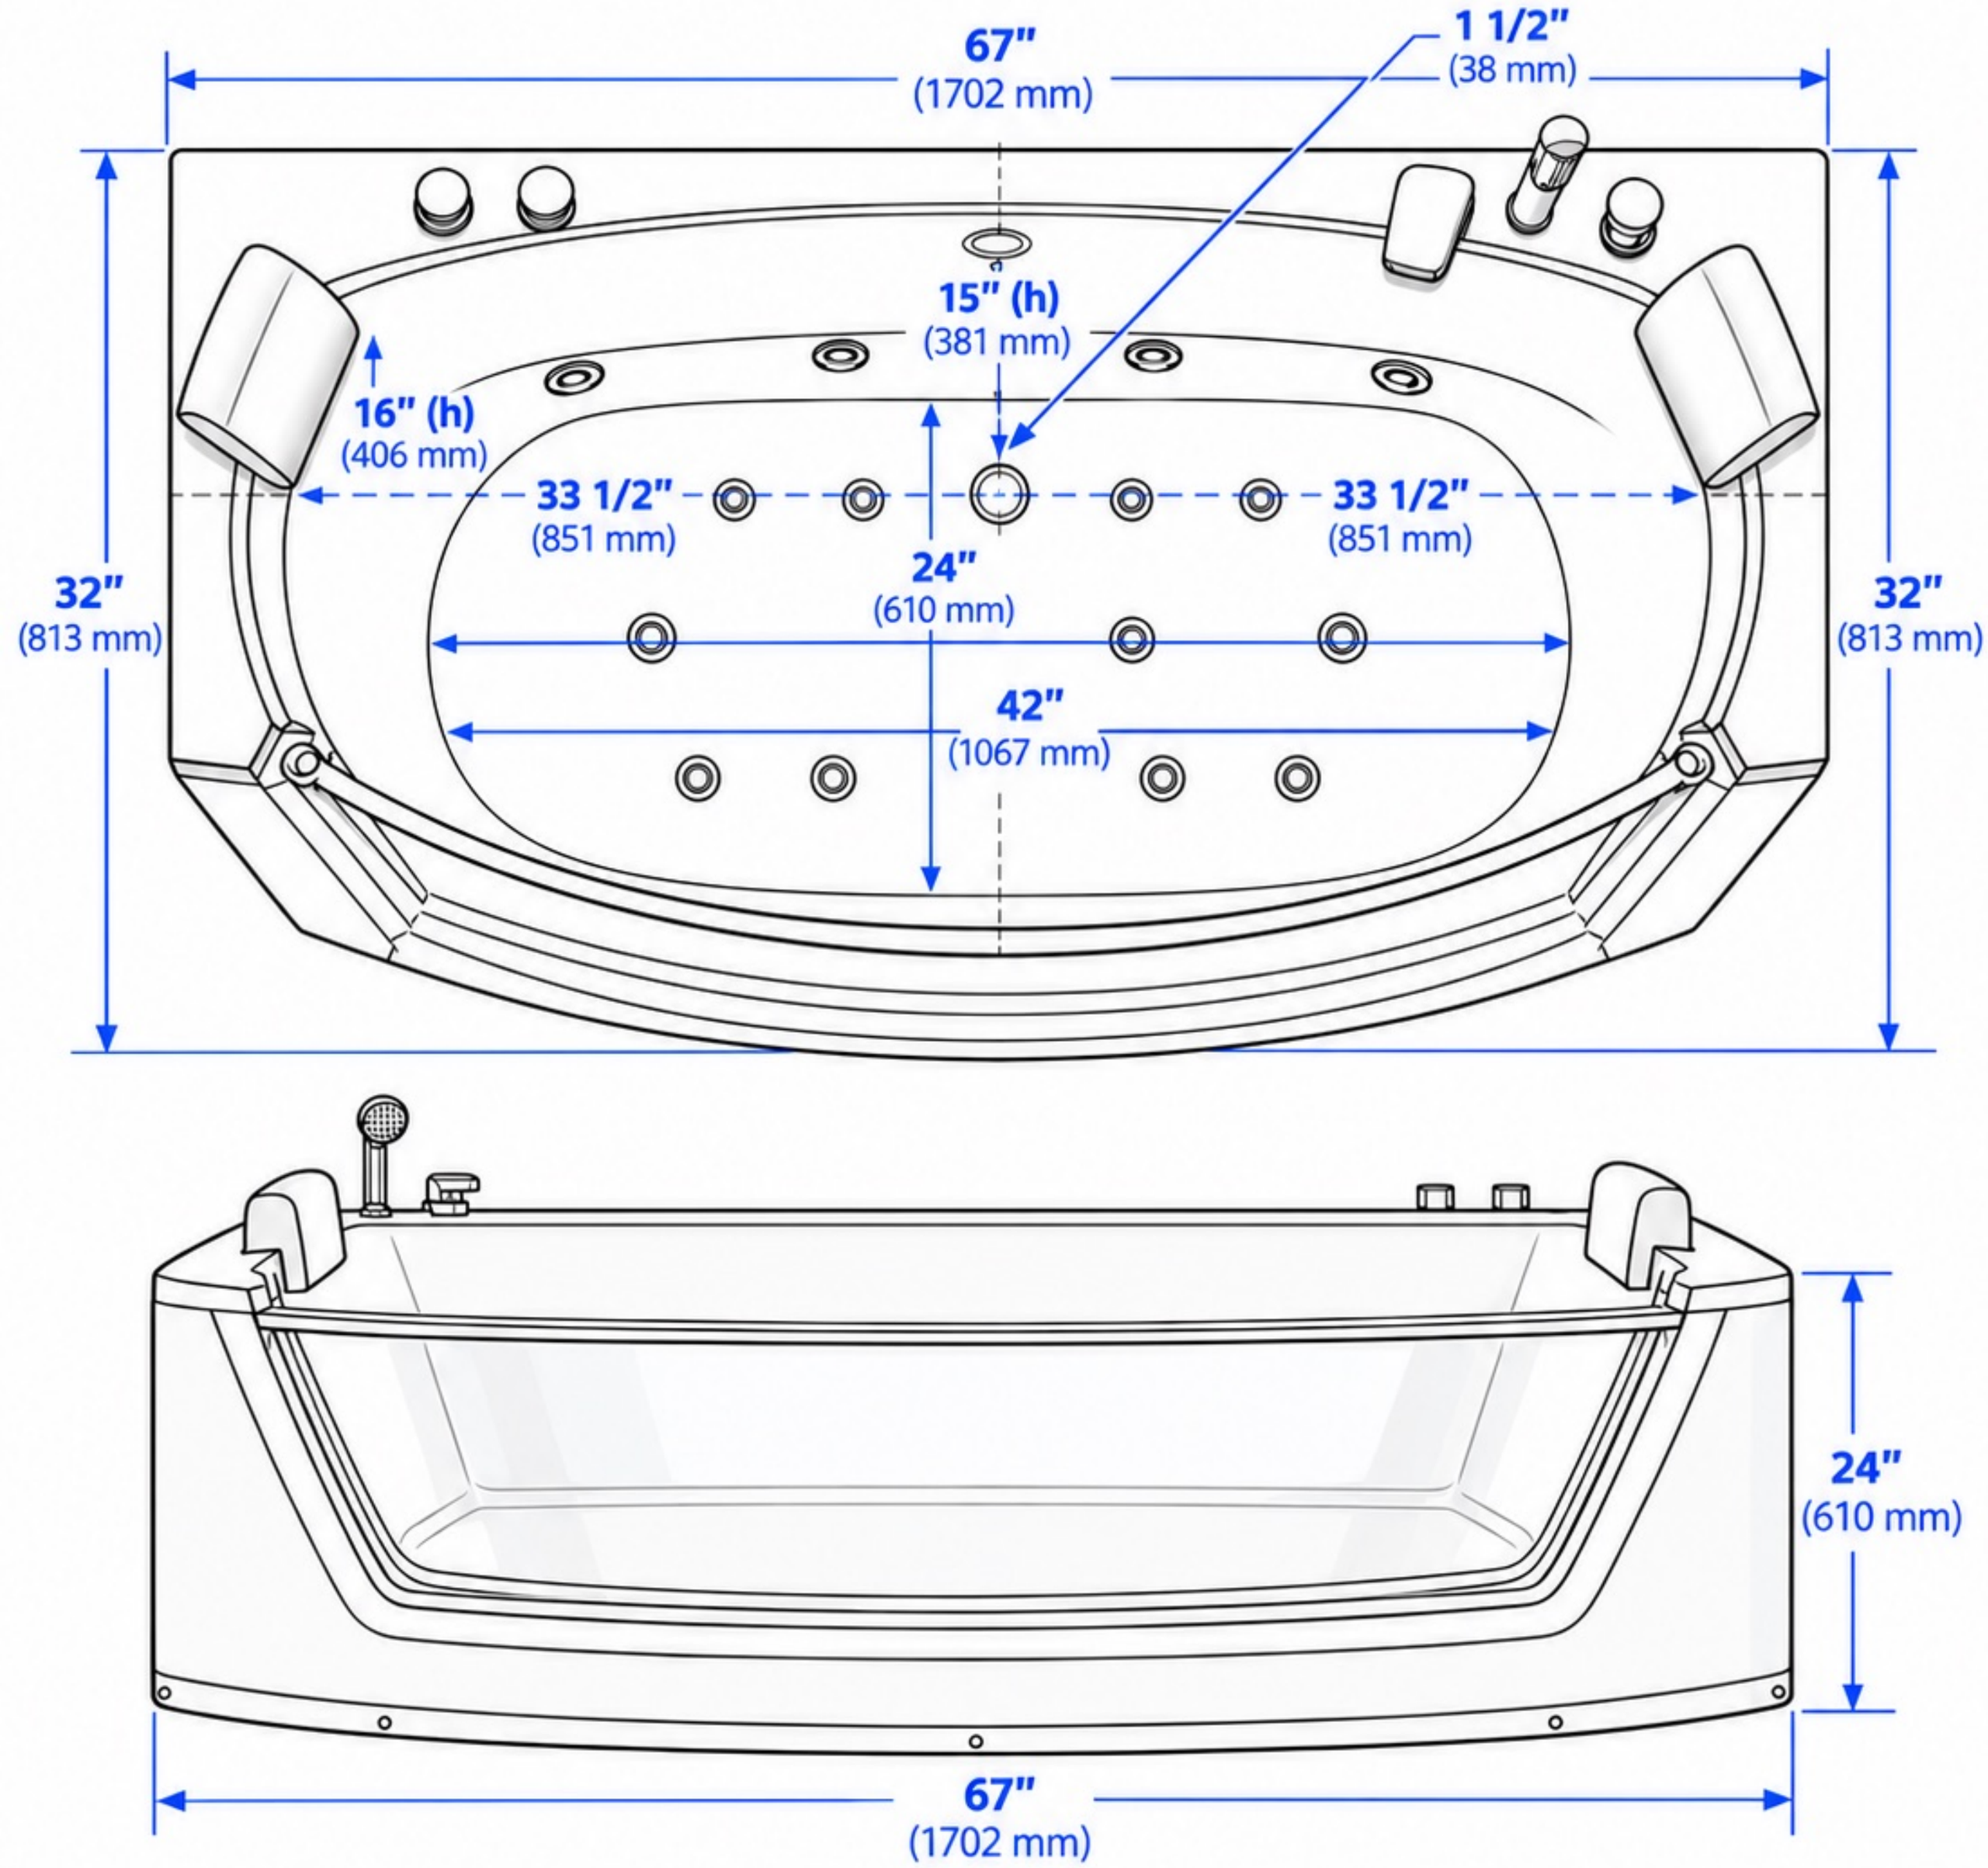


Accurate dimensions | Massage jets | Integrated water heater | Integrated controls | LED lighting | YEAR Warranty

Bouticcelli.com

Bouticcelli

BT55
LORENA

Recommended Pre-Installation

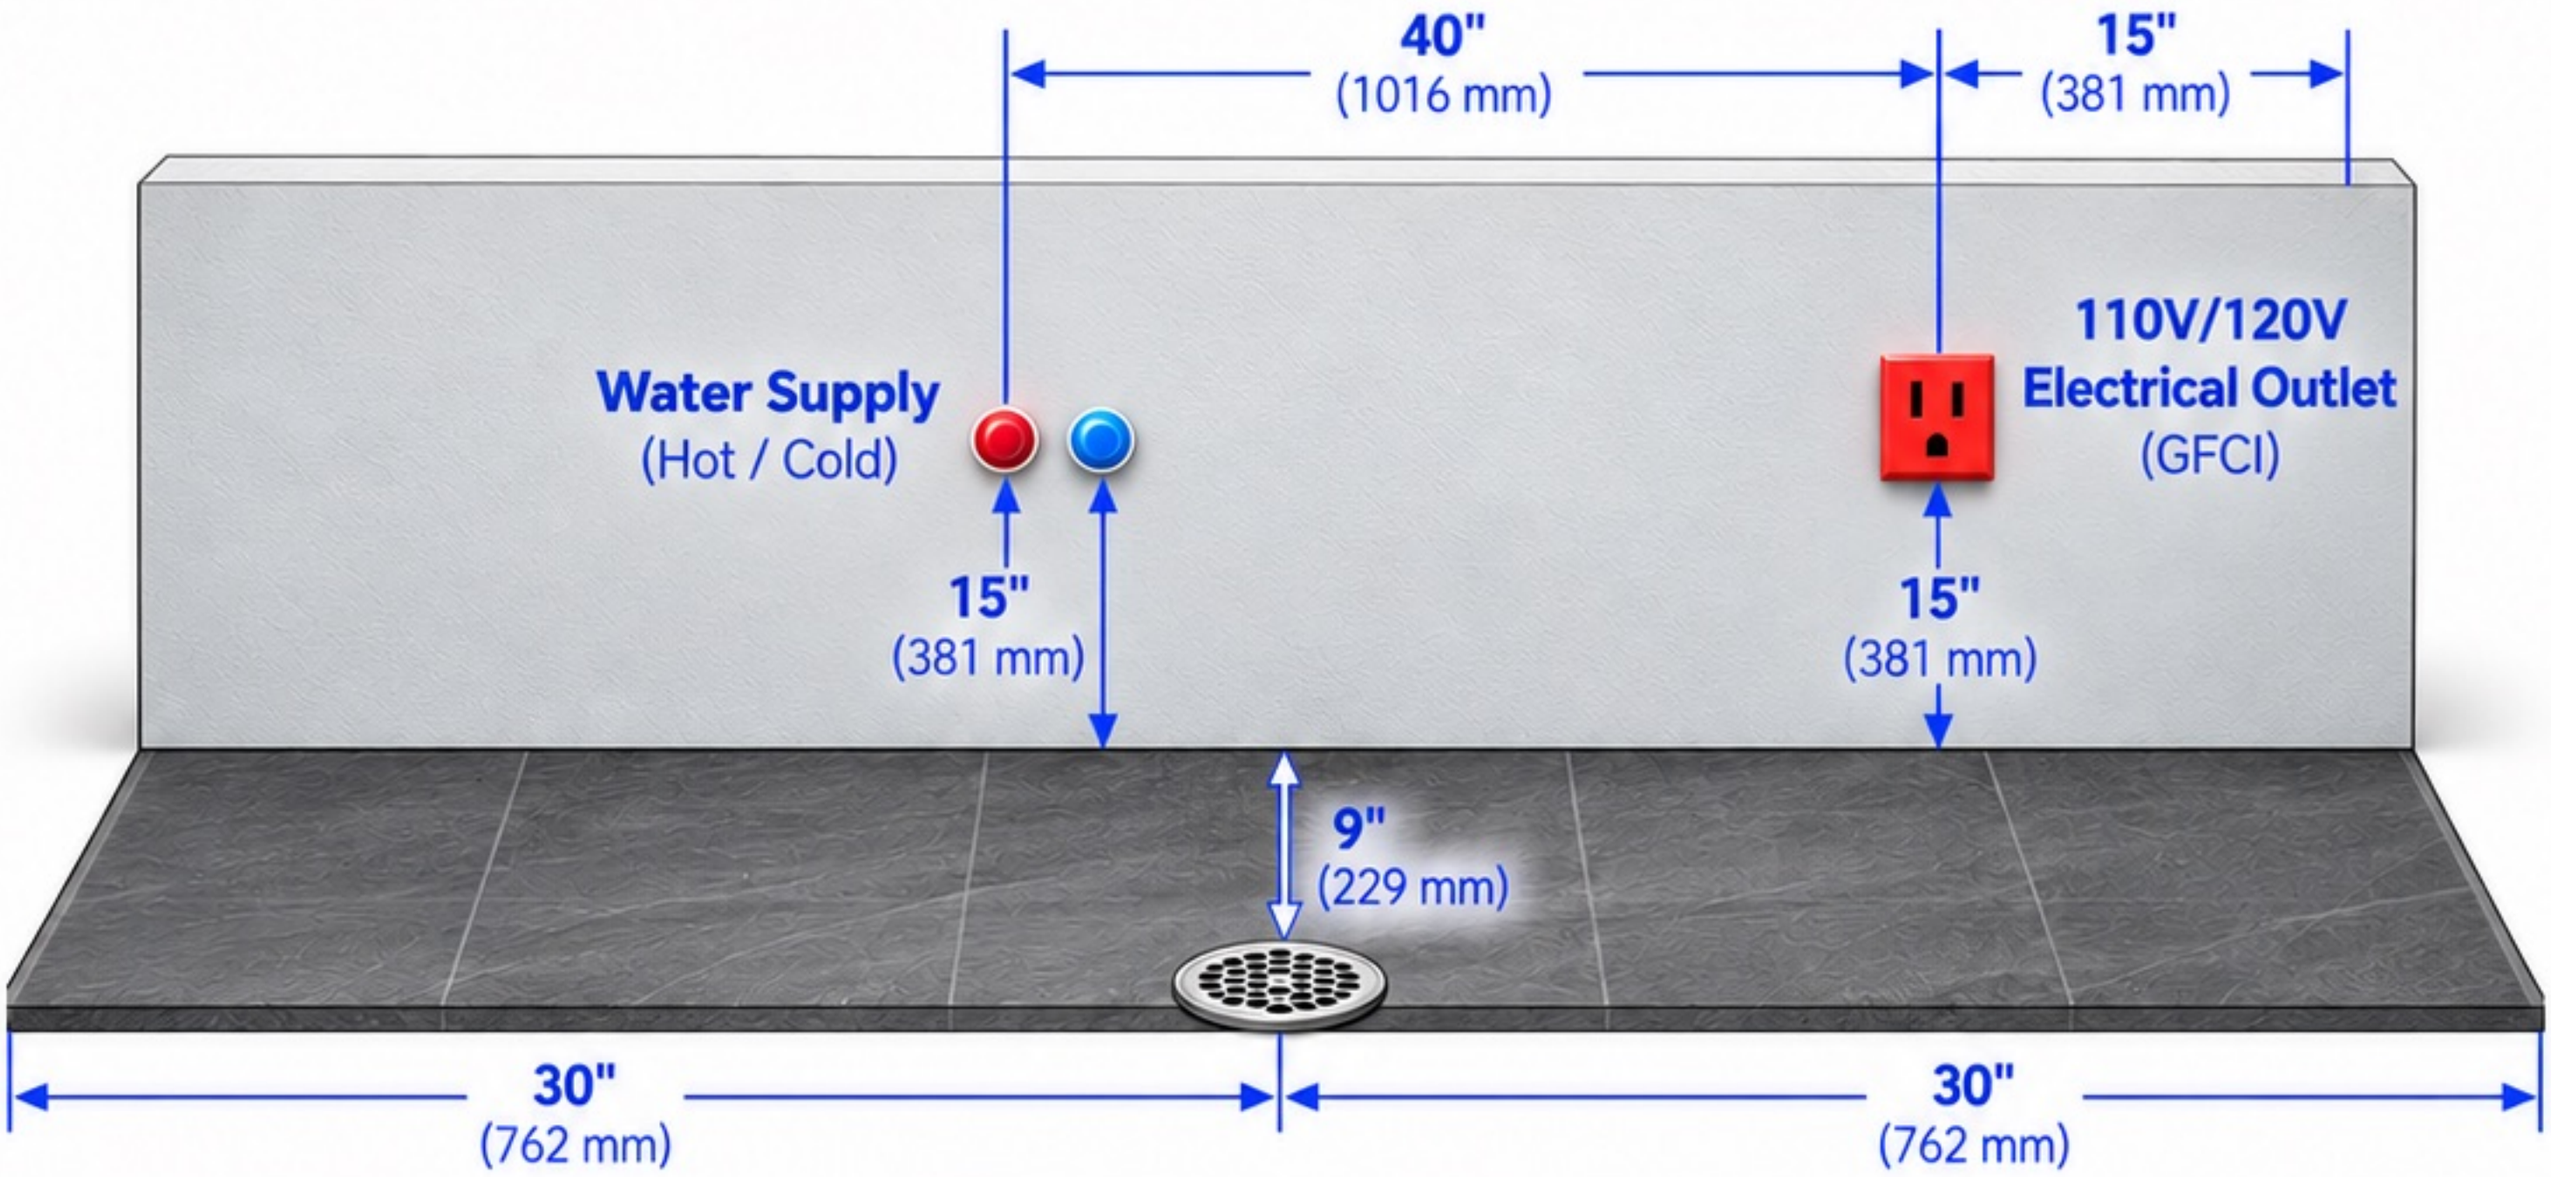

1 x 110V/120V
GFCI electrical outlet

2 x 1/2" water supply
connections
(hot and cold)

1 x 1 1/2"
drain connection

Électrical



- Provide 2 metres (6.5 ft) of electrical cable including hot (live), neutral and ground conductors.

OR

- Provide a 110–120 V / 20 A power supply, protected by a ground fault circuit interrupter (GFCI).

Plumbing



- Hot and cold water supply: provide 2 flexible hoses with 1/2" female fittings.
- Provide a 1 1/2" drain for connection to the supplied drain pipe.


Accurate dimensions | Massage jets | Integrated water heater | Integrated controls | LED lighting | 2-year warranty

Bouticcelli.com

Bouticcelli

Retractable Skirt

Installation and Removal of the Retractable Skirt

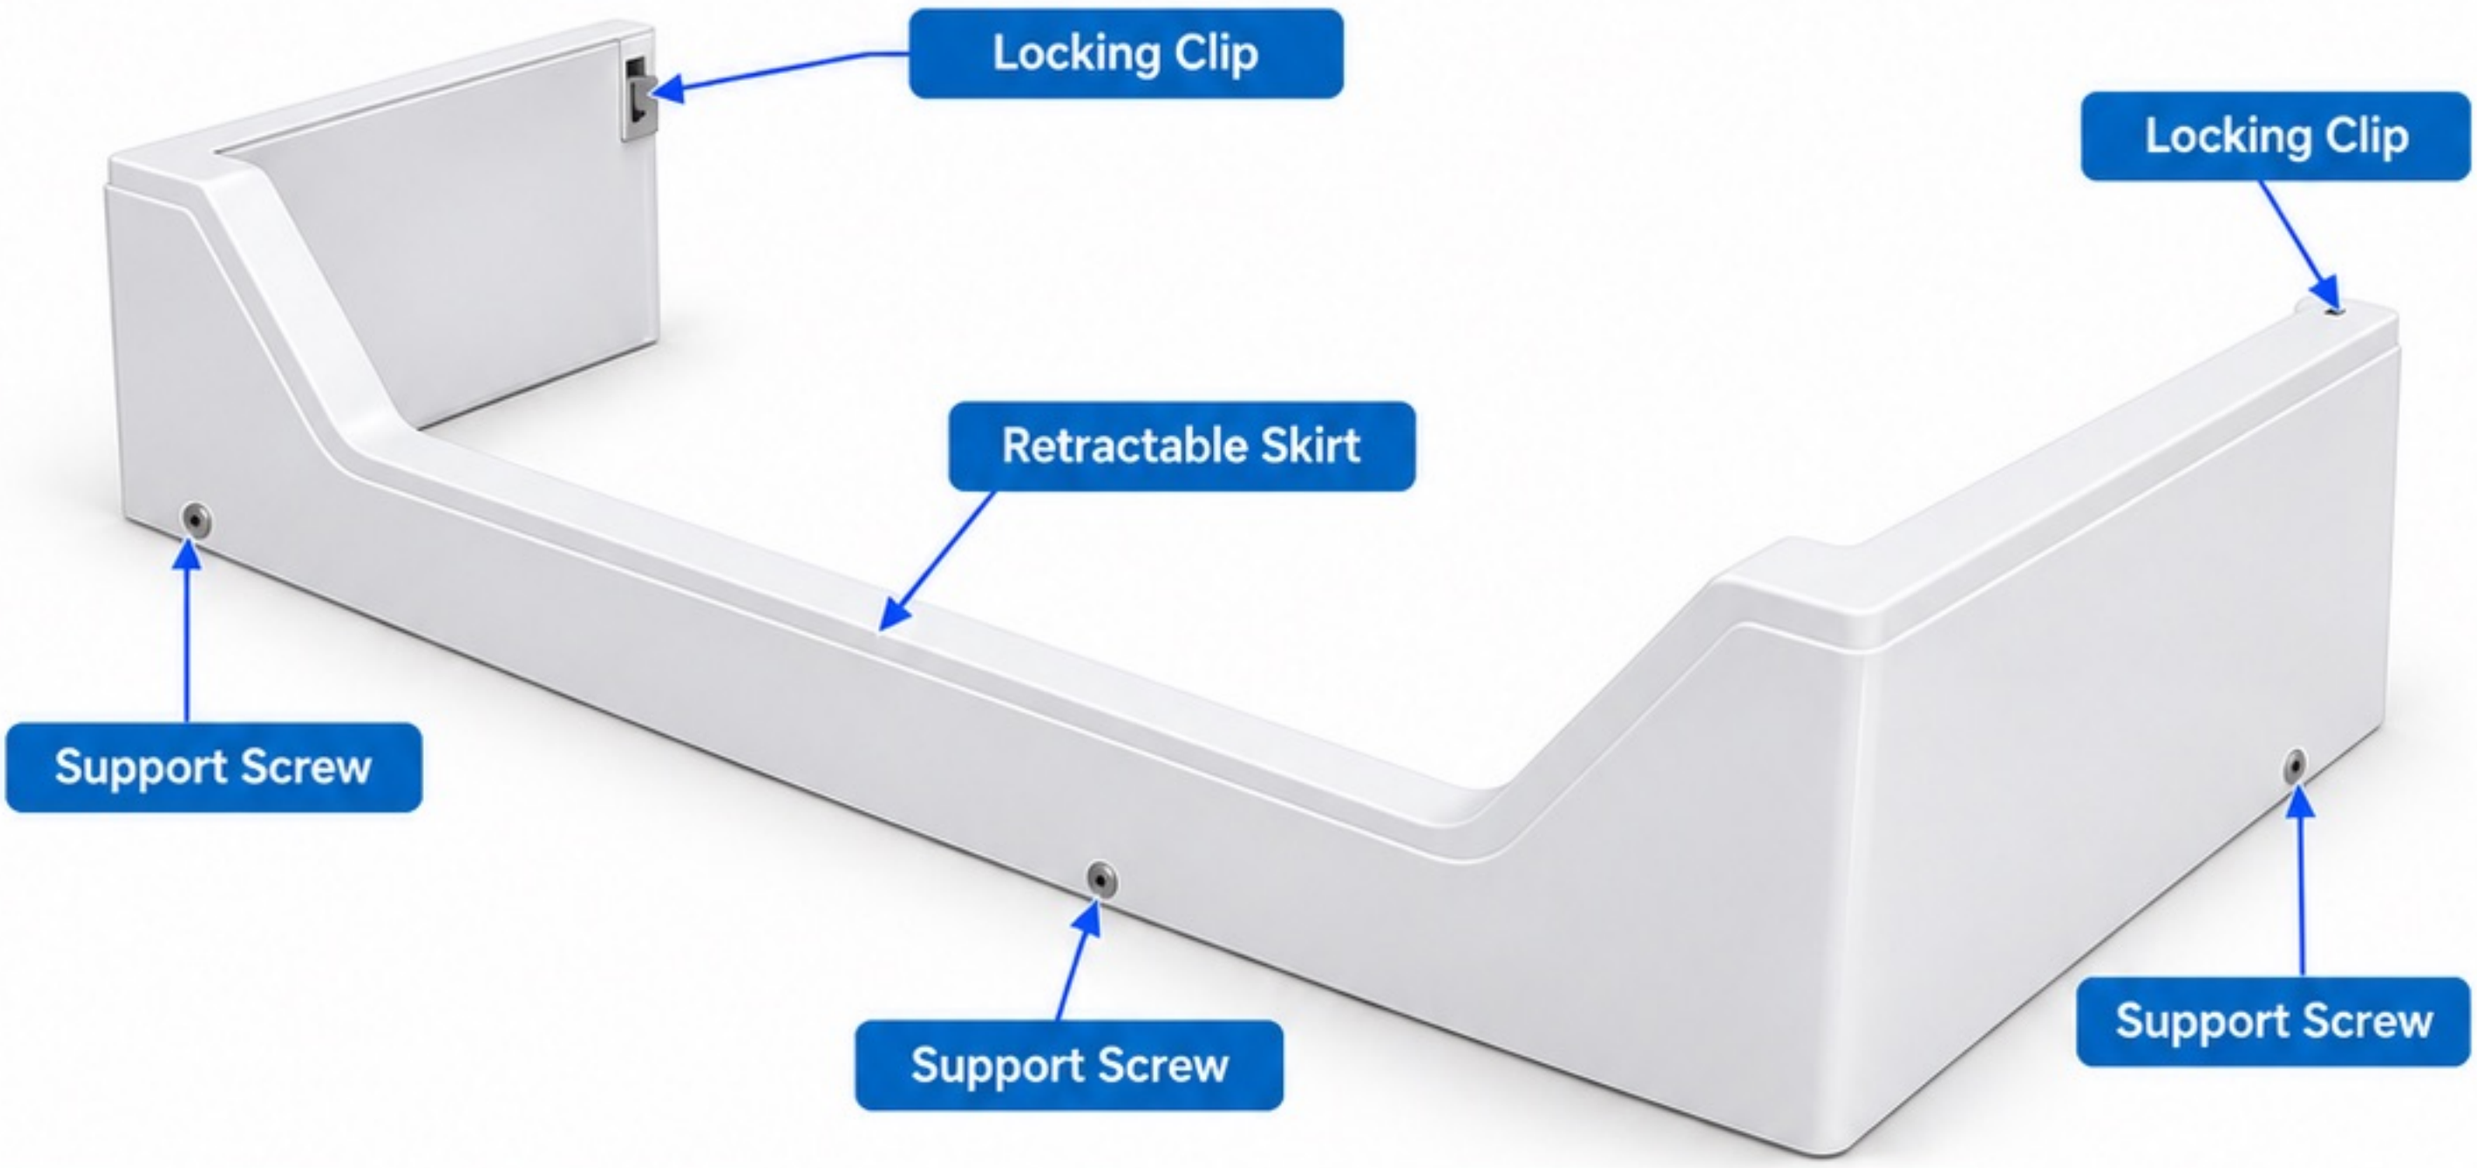

1 Removing the Skirt

1. Unscrew the white cap screws located at the bottom of the skirt.
2. Loosen the side locking clips located at the top.
3. Pull the skirt towards you to remove it from the bathtub.

2 Installing the Skirt

1. Place the skirt onto the top locking clips.
2. Tighten the side locking clips to secure the skirt in place.
3. Insert and tighten the lower support screws.
4. Put the white caps back on the screws.

Note: The skirt is secured to the bathtub with locking clips at the top and support screws at the bottom.